



TECHNICAL DATA SHEET

K-8084-SS

Heavy duty wall mount door bumper
with stainless steel concealed mounting


DRAWN BY:
dmartin

1/6/2016

TOLERANCES:

FRACTION : $\pm 1/32"$ X.XX : ± 0.015

\angle : $\pm 1^\circ$ X.XXX : ± 0.010

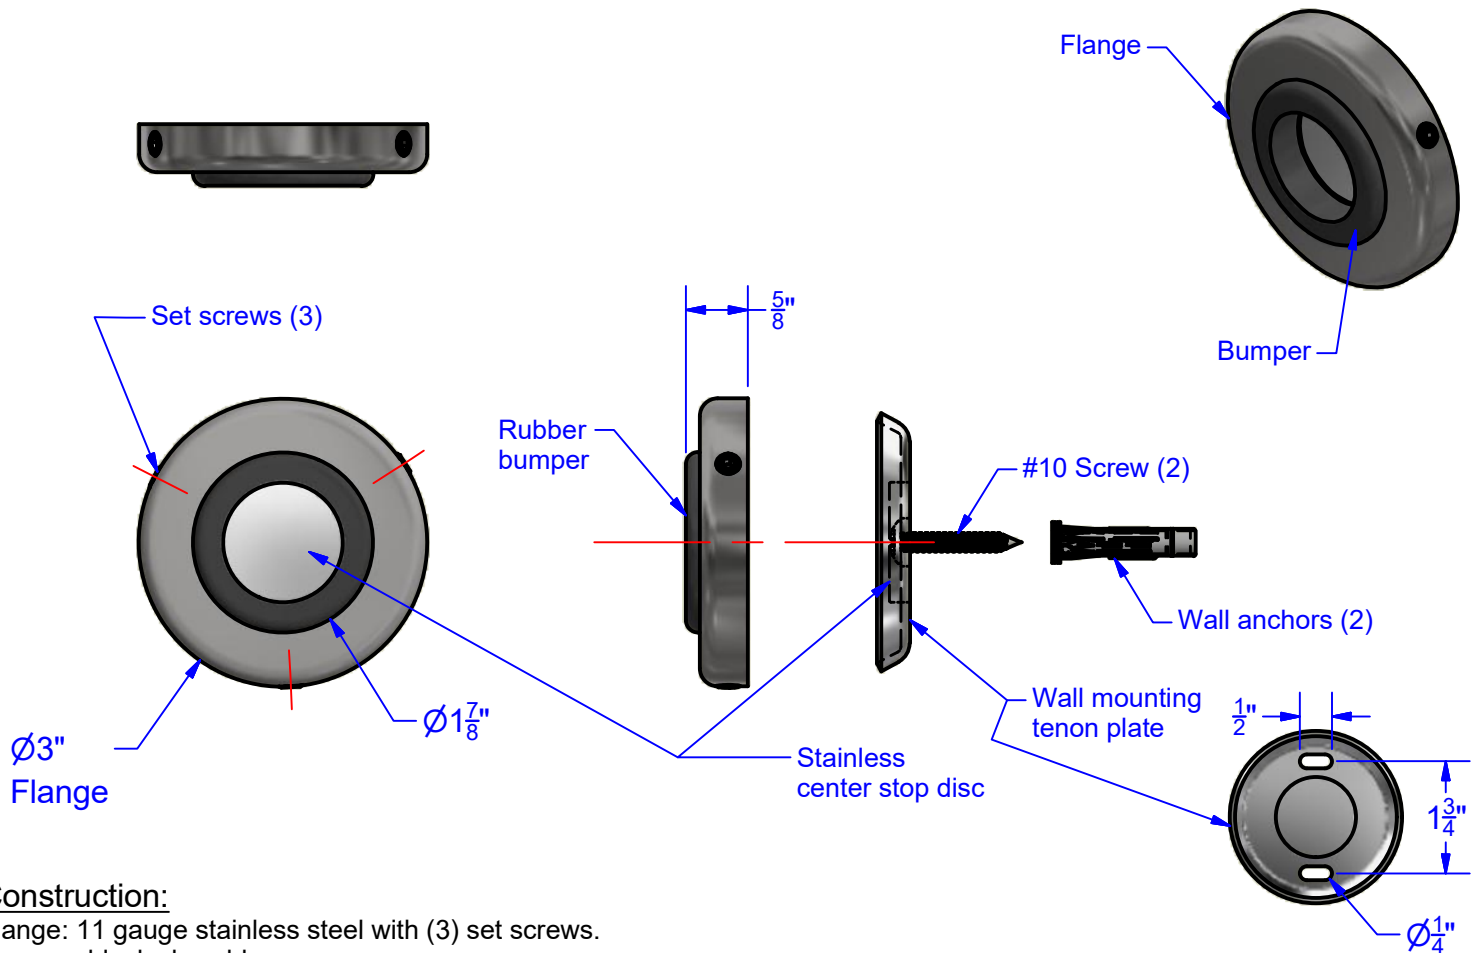

Construction:

Flange: 11 gauge stainless steel with (3) set screws.

Bumper: black sbr rubber.

Tenon plate: 13 gauge stainless steel with center stop disc. (2) slotted holes for mounting

Screws: #10 x 1 1/4" phillips trus head 18-8 stainless steel.

Finish: satin #4

Installation:

Align wall mounting tenon plate center stop disc to where door handle will hit the wall.

Fasten to wall using (2) supplied screws and wall anchors.

Slotted hole orientation may be in any direction.

Secure bumper-flange onto tenon plate using (3) set screws.

Guide specification:

Heavy duty concealed wall mount.

1 7/8" \varnothing black sbr rubber bumper.

3" \varnothing flange.

Satin #4 finish.