




Technical Data Sheet

K-44XX-48-SS
Corner Guard


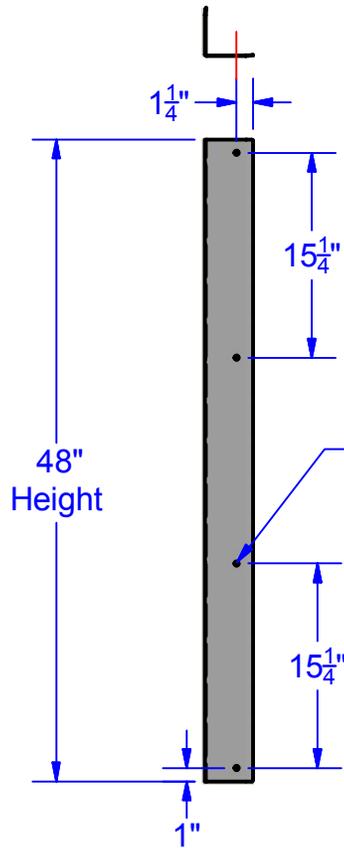


Ø $\frac{1}{4}$ " Ctsk.
For #10 oval head
screw. Typ. 8 plcs.

Screw mounting
(Choose part number below)

K-4430-48-SS = 18 gauge thickness.
K-4431-48-SS = 16 gauge thickness

Note: Screws are not included.

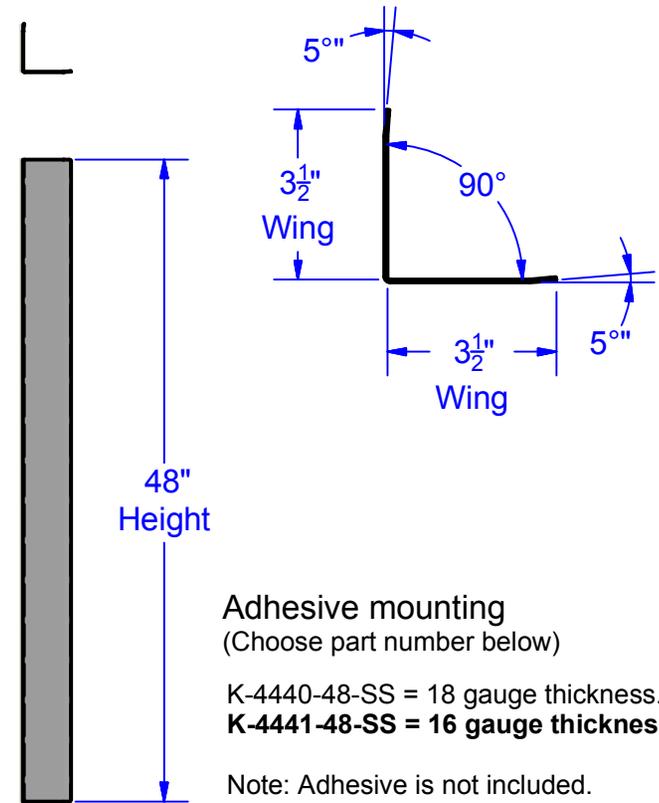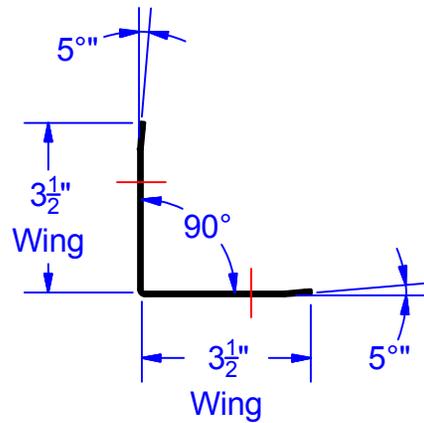

Adhesive mounting
(Choose part number below)

K-4440-48-SS = 18 gauge thickness.
K-4441-48-SS = 16 gauge thickness

Note: Adhesive is not included.

Construction:

Type 304 stainless steel.
Satin #4 finish.
See part number for material thickness and mounting style.

Installation:

Screw mounting:
Use corner guard as a template.
Fasten to wall using appropriate #10 oval head screws.
Remove protective vinyl coating.

Adhesive mounting:
Remove protective vinyl coating.
Use appropriate adhesive to fasten to wall.

Notes:

For custom sizes specify wing size, height, material thickness and mounting style.

18 gauge = .049 thick
16 gauge = .062 thick

Satin #4 finish is a brush architectural finish.