



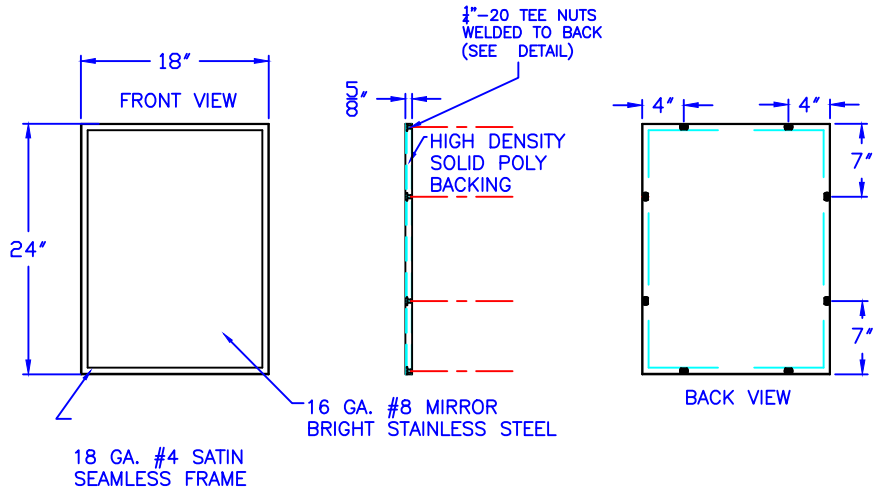

# Technical Data T-8014-01-SS

18" X 24" FRAMED SECURITY MIRROR

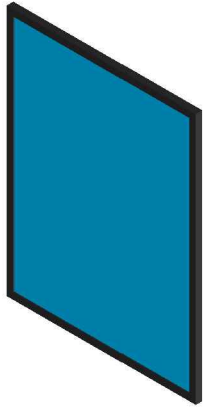

1/4"-20 TEE NUTS (8) WELDED TO BACK OF MIRROR.



MIN. WALL STUD REQ. =  $\frac{5}{16}$ " + WALL THICKNESS.  
EX. WALL THICKNESS = 5"  
MIN. WALL STUD IS 5  $\frac{5}{16}$ " LONG

WALL STUDS AND FASTENERS ARE NOT PROVIDED.

## Construction:

FRAME: SEAMLESS 18 GAUGE TYPE 304 STAINLESS STEEL ANGLE FRAME.  
CONCEALED UNITS HAVE 1/4"-20 TEE-NUTS WELDED TO BACK.  
#4 SATIN FINISH.

MIRROR: 16 GAUGE POLISHED BRIGHT TYPE 304 STAINLESS STEEL.  
BACKING: HIGH DENSITY SOLID POLY FIXED TO BACK OF MIRROR.

TEE-NUTS: 1/4"-20 STAINLESS STEEL WELDED TO BACK OF MIRROR.

## Installation:

- SET AND MARK DESIRED HEIGHT
- DRILL  $\frac{5}{16}$ " DIA. HOLE
- ASSEMBLE 1/4"-20 WALL STUDS INTO TEE-NUTS
- TIGHTEN EACH STUD EVENLY, \*\* DO NOT OVER TIGHTEN STUD
- USE UTILITY KNIFE TO SCORE AROUND THE FRAME, PEEL AND RE-MOVE.

NOTE: ACCESS BEHIND WALL IS REQUIRED.

NOTE: OVER TIGHTENING OF WALL STUDS WILL DAMAGE MIRROR

MIN. WALL STUD REQ. =  $\frac{5}{16}$ " + WALL THICKNESS.  
EX. WALL THICKNESS = 5"  
MIN. WALL STUD IS 5  $\frac{5}{16}$ " LONG

## Guide Specification:

18" WIDTH X 24" HEIGHT CONCEALED MOUNT SECURITY MIRROR.  
ANGLE FRAME IS CONSTRUCTED FROM 18 GAUGE TYPE 304 STAINLESS STEEL.  
MIRROR IS 16 GAUGE TYPE 304 POLISHED BRIGHT STAINLESS STEEL.  
FRAMED SEAMLESS CORNERS.

The manufacturer reserves the right to make changes in design and material without formal notice and without incurring obligation

© Copyright 2005  
Brey-Krause Manufacturing

Brey-Krause Manufacturing  
1209 West Lehigh Street, Bethlehem, PA 18018  
Phone: 610.867.1401 Fax: 610.866.1433  
www.breykrause.com