




Technical Data Sheet

S-3065-XX

1 1/4"Ø SHOWER ROD FLANGES

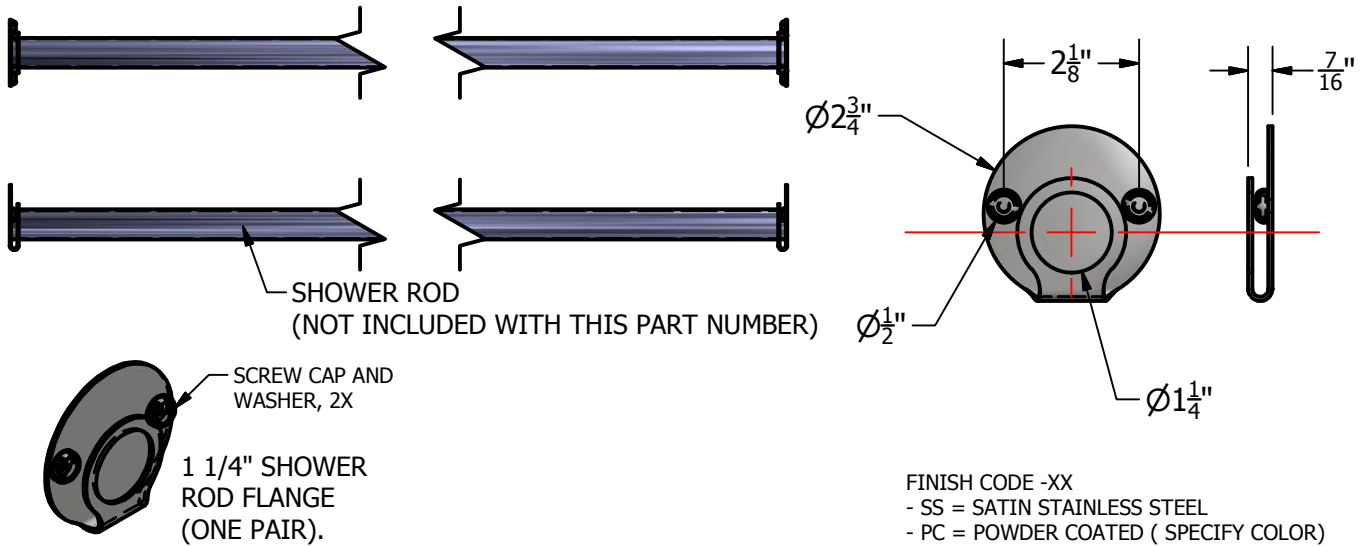

DATA CURRENT AS OF: 1/18/2013

CONSTRUCTION:

FLANGES (2): 16 GAUGE TYPE 304 STAINLESS STEEL, FORMED ONE PIECE.
 SCREW: #8 WOOD X 1 1/2" LONG PHIL. PAN HEAD. 18-8 STAINLESS STEEL.
 SCREW CAP: ELECTROPLATED SATIN CHROME SNAP-CAP.
 WASHER: FLAT BOTTOM PLASTIC SNAP-CAP.

INSTALLATION:

FASTEN ONE FLANGE TO WALL USING THE SUPPLIED SCREWS THROUGH THE SNAP-WASHER AND APPROPRIATE WALL ANCHORS (NOT SUPPLIED).
 INSERT SHOWER ROD AND REPEAT FOR OTHER FLANGE.
 PRESS ON THE SNAP-CAPS ONTO THE WASHER/SCREW UNTIL THEY SNAP INTO PLACE.

NOTE: SHOWER ROD FLANGES AND SHOWER ROD IS ONLY AS STRONG AS THE ANCHORING DEVICES AND THE WALL ON WHICH IT IS MOUNTED TO.

GUIDE SPECIFICATION:

FORMED ONE PIECE FLANGE FOR 1 1/4"Ø TUBE.
 16 GAUGE TYPE 304 STAINLESS STEEL.
 PART NUMBER INCLUDES ONE PAIR, SHOWER ROD IS NOT INCLUDED WITH THIS PART NUMBER.
 FINISHES AND BAR LENGTH AS INDICATED.

Brey-Krause Mfg. reserves the right to make changes in design and/or material without formal notice and without incurring any obligation.

**BREY-KRAUSE
MANUFACTURING**
© 2012

BREY-KRAUSE MANUFACTURING
1209 W. Lehigh Street, Bethlehem, PA 18018
Phone: 610-867-1401 Fax: 610-866-1433
www.brey-krause.com